



MINI TRACK LOADERS

MT100, MT120



THE BEST JUST GOT BETTER.



Machine: MT120
Attachment: Bucket

Bobcat® mini track loaders have been refreshed to push harder and keep crews moving. Updated styling and refined operator comfort help you stay focused through long days, while a lineup of more than 50 attachments opens the door to trenching, grading, material handling and whatever the job demands. It's the versatility to take on more work and the performance to finish it with confidence.

Tough, adaptable and agile, these loaders deliver the durability and performance you expect from Bobcat. Responsive controls keep operators moving, while the compact footprint gives you the control to work in tight spaces. The MT120 has best-in-class lift height and is telematics-ready with available Bobcat Machine IQ (factory- or field-installed), delivering the machine insights you need to stay productive.

For landscapers, contractors and rental stores, Bobcat mini track loaders are built to produce.



Machine: MT100
Attachment: Bucket

MODEL OVERVIEW



Machine: MT100
Attachment: Bucket

MT100	1,000 lb.	81.0 in.	24.8 hp	36 in.	11 gpm
	Rated Operating Capacity	Lift Height	Liquid-Cooled Diesel Engine	Width (with bucket)	Auxiliary Hydraulic Flow

THE BOBCAT **MT100**

The MT100 offers significant rated operating capacity (1,000 pounds) and breakout force. Its tough undercarriage includes heat-treated rollers and idlers that extend the life of the track system and enhance durability – so you can spend more time working and less time servicing your machine.



Machine: MT120
Attachment: Bucket



MACHINE IQ

MT120	1,200 lb.	88.2 in.	24.5 hp	36 in.	11.8 gpm
	Rated Operating Capacity	Lift Height	Liquid-Cooled Diesel Engine	Width (with bucket)	Auxiliary Hydraulic Flow

THE BOBCAT MT120

Designed with you and your challenges in mind, the MT120 offers superior lift capacity and best-in-class lift height and reach in a small but heavy-duty machine. With 1,200 pounds of capacity, 88.2 inches of lift height and simple pilot controls, it delivers strong performance and long-term value. Telematics-ready with available Bobcat Machine IQ, it lets you monitor machine location, track usage and receive service alerts to stay ahead of downtime. Remote enable and disable adds another layer of control and security.



Machine: MT120
Attachment: Pallet Fork

COMPACT MACHINE LEGENDARY PERFORMANCE

With a high capacity that tackles more of the job with every cycle, Bobcat mini track loaders make a perfect addition to your fleet. Under 36 inches wide and 87 inches long without an attachment, it can access areas that other machines can't. Squeeze through doorways or gates and work in close quarters indoors or outdoors. Rugged rubber tracks keep you going in soft, wet or muddy conditions, with minimal ground disturbance.

CONCENTRATED POWER

A Bobcat mini track loader packs a lot of power in a small package. It's the perfect solution for tight-fitting indoor and outdoor jobs where wheelbarrows and shovels are the only other option.

EASE OF USE

Bobcat mini track loaders offer an ideal combination of an easy-to-use machine in a less intimidating size – so they're a great match for new operators, renters and seasonal help – or for anyone who needs to do big jobs in small areas.

MINIMAL GROUND DISTURBANCE

Travel over established surfaces with minimal ground disturbance and fewer surface repairs. The Bobcat MT120 has a ground pressure as low as 4.3 psi with standard tracks and 3.9 psi with wide tracks.

POWERFUL NON-DPF ENGINE

Powered by high-torque, non-DPF engines, Bobcat mini track loaders deliver plenty of muscle for the job with no time lost to regeneration.

A COMFORTABLE VIEW TO THE CUTTING EDGE

The integrated ride-on platform provides a clear view to the bucket cutting edge or attachment, as well as to the sides of the machine. You can confidently operate from a natural position with less craning and straining to see the work. For improved operator comfort, the MT100 now includes softer hip pads, the same as those used on the MT120.

LOW COST OF OWNERSHIP

Rollers and idlers are permanently sealed and lubricated to reduce undercarriage maintenance and leave more time for your jobsite tasks. The MT120 also features maintenance-free bushings in the work group, as well as a direct system with no belts for less maintenance.



Machine: MT120
Attachment: Pallet Fork



Machine: MT100



Machine: MT120
Attachment: Grapple

MT120

SMOOTH PILOT CONTROLS

Do the work with smooth, fast, precise movement that responds seamlessly to your input. The MT120 has auxiliary hydraulic controls on the work group handle for extra convenience and simplicity during attachment operation.

CLASS-LEADING LIFT HEIGHT

The MT120 offers 88.2 inches of lift height to give you extra flexibility for loading trucks and trailers or placing materials in hard-to-reach areas.

VERSATILITY



*Machine: MT120
Attachment: Brush Grapple*

MORE ATTACHMENTS MEANS MORE PRODUCTIVITY

With an industry-leading attachment offering of 50-plus attachments, Bobcat delivers the versatility to match the way you work. Available with your choice of two attachment mounting systems, Bobcat mini track loaders move quickly from grading and backfilling to digging, hauling and more.

BOB-TACH ATTACHMENT MOUNTING SYSTEM

The Bob-Tach® attachment mounting system provides a wide selection of Bobcat-built attachments for mini track loaders. Its two robust, over-center latching pins provide the fastest attachment changes in the industry – and spring-loaded, wear-compensating wedges ensure a secure fit, time after time and year after year.

ATTACHMENTS FOR BOB-TACH ATTACHMENT MOUNTING SYSTEM:

- 36-inch bucket
- 44-inch bucket
- Angle broom
- Attachment adapter plate
- Auger
- Boring unit
- Digger
- Hydraulic breaker
- Industrial grapple
- Landplane
- Rotating hydraulic log grapple*
- Nitrogen breaker
- Pallet fork
- Root grapple
- Snowblower
- Soil conditioner
- Stump grinder
- Sweeper
- Tiller
- Trencher
- Utility blade
- Utility fork
- Utility grapple
- Vibratory plow

COMMON INDUSTRY INTERFACE (CII)

Choose the CII system for a smaller, pin-on attachment style that's common on mini track loaders but provides the same range of motion and usability as our industry-leading Bob-Tach system. The Bobcat CII system features exclusive dual over-center, 90-degree latches that make for secure and quick attachment hookup. The pin is greasable and serviceable to facilitate long product life and ease of use.

ATTACHMENTS FOR THE COMMON INDUSTRY INTERFACE:

- | | | |
|------------------------|-----------------------|---------------------|
| 36-inch GPX bucket CII | 44-inch GP bucket CII | Pallet fork CII |
| 36-inch GP bucket CII | Breaker CII frame | Trencher CII LT 113 |
| 44-inch GPX bucket CII | Model 10 auger CII | |

*MT100 only.



CHOOSE YOUR TRACKS.



Machine: MT100
Standard and optional wide track



Machine: MT120
Standard and optional wide track



Optional non-marking multi-bar lug rubber tracks won't leave black rubber marks on hard surfaces like concrete.

Multi-bar lug tracks (standard on MT120) combine increased traction with low vibration and excellent operator comfort. These flexible, cut-resistant and anti-gouge tracks are structurally designed to match the needs of your Bobcat mini track loader. Two different track sizes provide your preferred combination of performance and ground pressure.

STANDARD TRACK: UNDER 36 INCHES WIDE

Narrow tracks keep your machine's width to just 35.6 inches without an attachment. Depending on the size of your attachment, you can easily slip through doorways and fence gates. The narrow track ground pressure, as low as 4.3 psi on the MT120, provides good protection for most turf and finished surfaces.

WIDE TRACK: MINIMIZED GROUND PRESSURE


The optional wide track enhances ride quality while reducing ground pressure to as low as 3.9 psi on the MT120 – giving you the lightest-possible footprint for sensitive surfaces – and the mini track loader is still just 42 inches wide or less without an attachment.

MODELS	TRACK	PATTERN	SIZE	INSTALL OPTION
MT100	Standard/Narrow	C Pattern	7.0 in.	Factory & Field
		Multi-Bar Lug Non-Marking	7.0 in.	Field
		Chevron/V-Pattern	7.0 in.	Field
		Multi-Bar Lug	7.0 in.	Field
		Block Pattern	7.0 in.	Field
		Hex Pattern	7.0 in.	Field
	Wide	C Pattern	9.8 in.	Factory & Field
		Multi-Bar Lug Non-Marking	9.8 in.	Field
		Chevron/V-Pattern	9.8 in.	Field
		Multi-Bar Lug	9.1 in.	Factory & Field
		Zig-Zag Pattern	9.8 in.	Field
		Hex Pattern	9.8 in.	Field
MT120	Standard/Narrow	C Pattern	9.1 in.	Field
		Multi-Bar Lug Non-Marking	9.1 in.	Field
		Multi-Bar Lug	9.1 in.	Factory & Field
	Wide	C Pattern	11.0 in.	Field
		Multi-Bar Lug Non-Marking	11.0 in.	Field
		Multi-Bar Lug	11.0 in.	Factory & Field
		Zig-Zag Pattern	11.0 in.	Field

TRACK STRUCTURE

Each track is structurally designed to match the needs of your Bobcat equipment.

Cut-resistant, anti-gouge rubber compounds and tough outer rubber resist wear. A soft inner rubber compound provides flexibility.

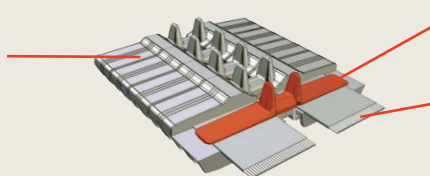

Steel imbeds (links) guide the sprocket while increasing track stability and strength.

Internal steel cables provide a strong base for the roller path while equalizing tension.

SPECIFICATIONS

MODEL	MT100	MT120	
PERFORMANCE	Rated Operating Capacity (ROC) (35% of tipping load)	1000 lb. (453 kg) ¹ / 1060 lb. (480 kg) ²	1200 lb. (544 kg)
	Lift Arm Path	Radius	Vertical
	Tipping Load	2898 lb. (1314 kg)	3468 lb. (1573 kg)
	Hydraulic Pump Capacity	11.0 gpm (41.6 L/min.)	11.8 gpm (44.7 L/min.)
	Travel Speed (forward)	4.1 mph (6.6 km/hr.)	4.7 mph (7.5 km/hr.)
	Travel Speed (reverse)	2.9 mph (4.7 km/hr.)	4.7 mph (7.5 km/hr.)
DIMENSIONS	Operating Weight (with bucket)	3390 lb. (1537 kg)	3720 lb. (1687 kg)
	Length (without bucket)	84.5 in. (2145 mm)	86.8 in. (2204 mm)
	Width (with bucket and standard tracks)	36.0 in. (914 mm)	36.0 in. (914 mm)
	Width (with bucket and wide tracks)	41.1 in. (1043 mm)	44.0 in. (1117 mm)
	Height	54.6 in. (1387 mm)	57.6 in. (1463 mm)
	Height to Bucket Hinge Pin	81.0 in. (2057 mm)	88.2 in. (2239 mm)
ENGINE	Reach – Fully Raised	18.6 in. (472 mm)	22.2 in. (563 mm)
	Emissions Tier (EPA)	Tier 4	Tier 4
	Fuel/Cooling	Diesel/Liquid	Diesel/Liquid
	Cylinders	3	3
	HP/Displacement	24.8 hp (18.5 kW)/55.0 cu. in. (0.9 L)	24.5 hp (18.2 kW)/75.2 cu. in. (1.2 L)
	Fuel Tank Capacity	7.0 gal. (26.5 L)	8.1 gal. (30.6 L)
TRACKS/ UNDERCARRIAGE	Track Width – Standard	7.0 in. (180 mm)	9.1 in. (230 mm)
	Track Width – Optional	9.8 in. (248 mm)	11.0 in. (280 mm)
	Ground Pressure (with standard tracks)	5.3 psi (35.8 kPa)	4.3 psi (29.0 kPa)
	Ground Pressure (with wide tracks)	4.0 psi (27.3 kPa)	3.9 psi (27.0 kPa)
	Grease Cylinder Track Tensioning	–	Std
OPERATION	Steering and Drive	ISO Joystick	ISO Joystick
	Lift and Tilt	ISO Joystick	ISO Joystick
	Transmission	Hydrostatic Track Drive System	Hydrostatic Track Drive System
	Attachment	Single Lever With Dual Direction Detent	Fingertip Auxiliary Hydraulics Control
MACHINE FEATURES AND OPTIONS	4.3" LCD Color Display With Keyless Start, Password Protection and Service/Warning Alerts	–	Std
	Attachment Control Kit	Opt	Opt
	Attachment Mounting System Conversion Kit (convert from CII to Bob-Tach system)	Opt	Opt
	Auxiliary Hydraulics	Std	Std
	Case Drain Kit	Opt	Std
	Catalytic Exhaust Purifier	Opt	Opt
	Choice of Attachment Mounting System	Bob-Tach mounting system or common industry interface (CII) system	Bob-Tach mounting system or common industry interface (CII) system
	Counterweight	Std – Removable	Std
	Engine Angle Sensor Kit	–	Opt
	Engine Block Heater	Opt	Opt
	Hydrostatic Drive Train	Std	Std
	Lift Arm Lockout With Manual Bypass	Std	Std
	Lift Arm Support	Std	Std
	Lift Hook Locations	Std	Std
	Light Kit (Front)	Opt	Opt
	Light Kit (Rear)	–	Opt
	Liquid-Cooled Diesel Engine	Std	Std
	Machine IQ (Telematics)	–	Opt
	Multi-Bar Lug Track	Opt	Std
	Neutral Start Interlocks	Std	–
	Non-Marking Tracks	Opt	Opt
	Parking Brake	Std	Std
	Ride-On Platform	Std	Std
	Spark Arrestor Muffler	Std	Std
	Tie-Down Locations	Std	Std
	Tilt Lockout	Std	Std


¹Counterweights located in the undercarriage.

²Counterweights located in rear position.

Bobcat.
MT20
201*
E-1201*
9454
Print



Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2026 Bobcat Company. All rights reserved.

DOOSAN

BOBCAT COMPANY • 250 EAST BEATON DRIVE • WEST FARGO, ND 58078 • BOBCAT.COM

B-1776 (05/26)
EP-7M-0526-24389-F